



www.alpfrigo.com

quality of
cooling

0 nas

Alpfrigo je družinsko podjetje, specializirano za razvoj, proizvodnjo in trženje hladilne opreme za živilsko industrijo, pekarstvo in gostinstvo. Na podlagi lastnega razvoja in dolgoletnih izkušenj na področju hladilstva je podjetje razširilo svoj proizvodni program na področje medicine, farmacije in laboratorijev.

Podjetje je leta 2001 ustanovila skupina strokovnjakov z dolgoletnimi izkušnjami na področju hladilne tehnike. Od ustanovitve dalje podjetje stalno vlaga v razvoj obstoječih in novih proizvodov ter v širitev trga. Smo izvozno usmerjeno podjetje, 90 % prihodka ustvarimo z izvozom, največ na trgih EU. Prisotni smo v več kot 30 državah.

Podjetje se odlikuje po inovativnosti in izvirnih rešitvah, prilagojenih potrebam posameznih kupcev, kot tudi po fleksibilnosti in kvaliteti.

Kakovost in fleksibilnost proizvodnje je naša prioriteta. Da le to lahko zagotovimo, se vse faze proizvodnje in kontrole izvajajo v naših prostorih. Nenehno opravljamo nadzor kakovosti v različnih fazah proizvodnje. Vsak izdelek kontroliramo in testiramo pred odpremo. Uporabljamo materiale in opremo evropskega porekla.

About us

Alpfrigo d.o.o. is a family owned company which designs, manufactures and markets professional refrigeration products for the food processing industry, bakery applications, catering and supermarkets. The company has recently extended its range of top quality products to include products for medical, pharmaceutical and laboratory use. These are based on its own research and development activities and practical experiences in the refrigeration field.

The company began manufacture in 2001 with a team of experienced professionals with indepth technical and marketing knowledge in the refrigeration industry. Over the years it has been constantly studying and researching new solutions in order to improve existing products and develop new alternatives and product lines. Constant

innovation and improvement, taking customers' feedback and specific market requirements into account, are core values of Alpfrigo. These values together with high flexibility enable the company to offer variations to its standard products with different custom options.

Alpfrigo d.o.o exports its products to 30 countries, mostly in the EU.

Quality and flexible production are our priority. To ensure we meet these criteria all phases of production and quality control are carried out within our premises. We constantly perform quality control checks at different stages of production. Each finished product is checked and tested before delivery. We use material and components of European origin.

Hladilne omare GN2/1

Refrigerated cabinets GN2/1





Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CM 700 SS	710x800x2000	650	150	-2/+8	425	230/50	4
CN 700 SS	710x800x2000	650	162	-18/-24	600	230/50	4
CM 1400 SS	1420x800x2000	1300	230	-2/+8	530	230/50	8
CN 1400 SS	1420x800x2000	1300	245	-18/-24	700	230/50	8
CM/CM 700 SS	710x800x2000	650	165	+2/+10, -2/+8	540	230/50	4
CM/CN 700 SS	710x800x2000	650	165	-2/+8, -18/-22	720	230/50	4
CN/CN 700 SS	710x800x2000	650	165	-18/-22, -18	850	230/50	4
CM/CN 1400 SS	1420x800x2000	1300	254	-2/+8, -18/-22	1025	230/50	8
CM 700 SS SV*	710x800x2000	650	160	-2/+8	425	230/50	4
CN 700 SS SV*	710x800x2000	650	170	-18/+22	700	230/50	4
CM 1400 SS SV*	1420x800x2000	1300	250	-2/+8	640	230/50	8
CN 1400 SS SV*	1420x800x2000	1300	270	-18/-22	900	230/50	8

* za temperaturo okolice 32 °C / for ambient temperature of 32°C

C..... Omara GN2/1 | Cabinet GN2/1

700/1400... Model | Model

SS..... Nerjaveča pločevina AISI 304 | Stainless steel AISI 304

SV..... Steklana vrata | Glass door

2D..... Dvojna vrata po višini | Two vertical doors

RU..... Oddvojeni agregat | Remote unit

M..... Temperaturno območje -2°/-8° | Temperature range -2°/-8°

N..... Temperaturno območje -18°/-24° | Temperature range 18°/-24°

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304
Zunanji plašč sijaj | Scotchbrite polished outer coat
Avtomatsko delovanje | Fully automatic operation
Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm
Leva-desna vrata | Reversible doors
Samozaporna vrata | Self closing doors
Elektronska regulacija | Electronically controlled
Dinamično hlajenje | Fan assisted cooling
Zamenljiva guma na vratih | Replaceable door gasket
Nastavljive noge | Adjustable feet
Ključavnica | Lock
Zaobljeni koti za enostavno čiščenje | Rounded corners for easy cleaning
Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C
Zamenljiva hladilna enota | Removable compact refrigerating unit
Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING


Nastavljive in odstranljive nosilne letve | Adjustable and removable shelf supports
Plastificirane rešetke | Plastic coated shelves
Notranja osvetlitev | Internal lighting
Ključavnica | Lock

OPCIJE | OPTIONS

Zračni filter kondenzatorja | Condenser air filter
Možnost visoke ali nizke vlage (CM modeli) | Low/high humidity mode (CM models)
RU verzija | RU version
RF rešetke | SS shelves
LED osvetlitev | LED lighting
R290 okolju prijazen plin | R290 environment-friendly gas

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors
Nožno pedalo | Foot pedal
Pekarski set | Confectionary set

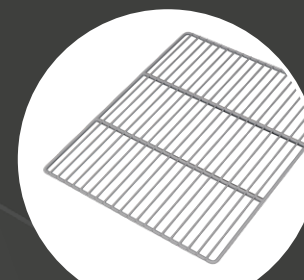

RF rešetka

SS shelves



zamenljiva guma

replaceable door gasket



kolesca

castors



zaobljeni vogali

rounded corners



nožno pedalo

foot pedal



zamenljiv agregat

removable refrigerating unit

Hladilne omare Q

Refrigerated cabinets Q



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CM 700 SS Q	830x700x2000	650	150	-2/+8	425	230/50	4
CN 700 SS Q	830x700x2000	650	162	-18/-24	600	230/50	4

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304
Zunanji plašč sijaj | Scotchbrite polished outer coat
Avtomatsko delovanje | Fully automatic operation
Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm
Leva-desna vrata | Reversible doors
Samozaporna vrata | Self closing doors
Elektronska regulacija | Electronically controlled
Dinamično hlajenje | Fan assisted cooling
Zamenljiva guma na vratih | Replaceable door gasket
Nastavljive noge | Adjustable feet
Ključavnica | Lock
Zaobljeni koti za enostavno čiščenje | Rounded corners for easy cleaning
Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C
Zamenljiva hladilna enota | Removable compact refrigerating unit
Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING


Nastavljive in odstranljive nosilne letve | Adjustable and removable shelf supports
Plastificirane rešetke | Plastic coated shelves
Notranja osvetlitev | Internal lighting
Ključavnica | Lock

OPCIJE | OPTIONS

Zračni filter kondenzatorja | Condenser air filter
Možnost visoke ali nizke vlage (CM modeli) | Low/high humidity mode (CM models)
RU verzija | RU version
RF rešetke | SS shelves
LED osvetlitev | LED lighting
R290 okolju prijazen plin | R290 environment-friendly gas

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors
Nožno pedalo | Foot pedal
Pekarski set | Confectionary set



RF rešetka

SS shelves



zamenljiva guma

replaceable door gasket



kolesca

castors



zaobljeni vogali

rounded corners



nožno pedalo

foot pedal



zamenljiv agregat

removable refrigerating unit

Hladilne omare 500

Refrigerated cabinets 500





Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CM 500 SS	710x700x2000	450	140	-2/+8	425	230/50	3
CN 500 SS	710x700x2000	450	152	-18/-24	500	230/50	3
CM 500 SS 2D	710x700x2000	450	140	-2/+8	425	230/50	3
CN 500 SS 2D	710x700x2000	450	152	-18/-24	500	230/50	3
CM/CM 500 SS	710x700x2000	450	165	+2/+10, -2/+8	540	230/50	4
CM/CN 500 SS	710x700x2000	450	165	-2/+8, -18/-22	720	230/50	4
CM/CN 500 SS	710x700x2000	450	165	-18/-22, -18	850	230/50	4
CM 1100 SS	1420x700x2000	1000	220	-2/+8	640	230/50	6
CN 1100 SS	1420x700x2000	1000	235	-18/-24	500	230/50	6
CM 500 SS SV*	710x700x2000	450	150	-2/+8	425	230/50	3
CN 500 SS SV*	710x700x2000	450	160	-18/-22	500	230/50	3
CM 1100 SS SV*	1420x700x2000	1000	240	-2/+8	530	230/50	6
CN 1100 SS SV*	1420x700x2000	1000	260	-18/-22	900	230/50	6

* za temperaturo okolice 32 °C / for ambient temperature of 32°C

C..... Omara GN2/1 | Cabinet GN2/1

500/1100... Model | Model

SS..... Nerjaveča pločevina AISI 304 | Stainless steel AISI 304

SV..... Steklена vrata | Glass door

2D..... Dvojna vrata po višini | Two vertical doors

M..... Temperaturno območje -2°/-8° | Temperature range -2°/-8°

N..... Temperaturno območje -18°/-24° | Temperature range 18°/-24°

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304
Zunanji plašč sijaj | Scotchbrite polished outer coat
Avtomatsko delovanje | Fully automatic operation
Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm
Leva-desna vrata | Reversible doors
Samozaporna vrata | Self closing doors
Elektronska regulacija | Electronically controlled
Dinamično hlajenje | Fan assisted cooling
Zamenljiva guma na vratih | Replaceable door gasket
Nastavljive noge | Adjustable feet
Ključavnica | Lock
Zaobljeni koti za enostavno čiščenje | Rounded corners for easy cleaning
Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C
Zamenljiva hladilna enota | Removable compact refrigerating unit
Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING


Nastavljive in odstranljive nosilne letve | Adjustable and removable shelf supports
Plastificirane rešetke | Plastic coated shelves
Notranja osvetlitev | Internal lighting
Ključavnica | Lock

OPCIJE | OPTIONS

Zračni filter kondenzatorja | Condenser air filter
Možnost visoke ali nizke vlage (CM modeli) | Low/high humidity mode (CM models)
RU verzija | RU version
RF rešetke | SS shelves
LED osvetlitev | LED lighting
R290 okolju prijazen plin | R290 environment-friendly gas

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors
Nožno pedalo | Foot pedal

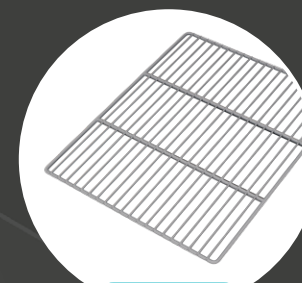

RF rešetka

SS shelf



zamenljiva guma

replaceable door gasket



nožno pedalo

foot pedal



zaobljeni vogali

rounded corners



kolesca

castors



zamenljiv agregat

removable refrigerating unit

Hladilne omare za ribe

Fish cabinets



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CMF 600	780x680x2000	505	140	-3/+10	425	230/50	12
CFF 600	780x680x2000	505	150	-5/-30	600	230/50	12

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304
Zunanji plašč sijaj | Scotchbrite polished outer coat
Avtomatsko delovanje | Fully automatic operation
Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm
Leva-desna vrata | Reversible doors
Samozaporna vrata | Self closing doors
Elektronska regulacija | Electronically controlled
Dinamično hlajenje | Fan assisted cooling
Zamenljiva guma na vratih | Replaceable door gasket
Nastavljive noge | Adjustable feet
Ključavnica | Lock
Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning
Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C
Zamenljiva hladilna enota | Removable compact refrigerating unit
Dno z odtokom | Floor with drain
Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

Nastavljive in odstranljive nosilne letve | Adjustable and removable shelf supports
PVC predal dim: 400 x 600 x 70 z RF dnom | PVC drawers dim: 400 x 600 x 70 with SS bottom
Ključavnica | Lock

OPCIJE | OPTIONS

Kolesca | Castors
Izvedba brez agregata | Remote unit
Steklena vrata | Glass door
Zračni filter kondenzatorja | Condenser air filter
Možnost visoke ali nizke vlage (CM modeli) | Low/high humidity mode (CM models)
RU verzija | RU version
R290 okolju prijazen plin | R290 environment-friendly gas

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors
Nožno pedalo | Foot pedal
Steklena vrata | Glass door



nožno pedalo

foot pedal



zamenljiva guma

replaceable door gasket



zaobljeni vogali

rounded corners



kolesca

castors



odstranljivo dno predala

removable bottom, press

Hladilne omare za kampe

Camping cabinets



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]
CN CAMP 700	710x800x2000	650	180	-18/-24	650	230/50
CM CAMP 700	710x800x2000	650	180	-2/+8	425	230/50
CN CAMP 500	710x700x2000	550	170	-18/-24	500	230/50
CM CAMP 500	710x700x2000	550	170	-2/+8	425	230/50

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304

Zunanji plašč sijaj | Scotchbrite polished outer coat

Avtomatsko delovanje | Fully automatic operation

Izolacija brez CFC – 70 mm | Isolation 100% CFC free – 70mm

Leva-desna vrata | Reversible doors

Samozaporna vrata | Self closing doors

Elektronska regulacija | Electronically controlled

Dinamično hlajenje | Fan assisted cooling

Zamenljiva guma na vratih | Replaceable door gasket

Nastavljive noge | Adjustable feet

Ključavnica | Lock

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C

Zamenljiva hladilna enota | Removable compact refrigerating unit

Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

10 prekatov s ključavnicami izdelanih iz AISI 304 | 10 compartments with locks made of AISI 304

OPCIJE | OPTIONS

Kolesca | Castors

Izvedba brez agregata | Remote unit

Število prekatov po želji | Custom number of compartments on request

Zračni filter kondenzatorja | Condenser air filter

Možnost visoke ali nizke vlage (CM modeli) | Low/high humidity mode (CM models)

RU verzija | RU version

R290 okolju prijazen plin | R290 environment-friendly gas

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors

Nožno pedalo | Foot pedal



zamenljiva guma

replaceable door gasket



zaobljeni vogali

rounded corners



kolesca

castors

Hladilne omare brez stebrička

Refrigerated cabinets without vertical divider



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CM 1400 X1	1420x800x2000	1500	220	-2/+8	530	220/60	4
CN 1400 X1	1420x800x2000	1500	220	-18/-22	900	220/60	4

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304
Zunanji plašč sijaj | Scotchbrite polished outer coat
Avtomatsko delovanje | Fully automatic operation
Izolacija brez CFC – 70 mm | Isolation 100% CFC free – 70mm
Leva-desna vrata | Reversible doors
Samozaporna vrata | Self closing doors
Elektronska regulacija | Electronically controlled
Dinamično hlajenje | Fan assisted cooling
Zamenljiva guma na vratih | Replaceable door gasket
Nastavljive noge | Adjustable feet
Ključavnica | Lock
Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning
Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C
Zamenljiva hladilna enota | Removable compact refrigerating unit
Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

Nastavljivi in odstranljivi U – profili | Adjustable and removable U – supports
Nastavljive in odstranljive nosilne letve | Adjustable and removable shelf supports
Ključavnica | Lock
4 perforirani pladnji iz nerjavečega jekla | 4 stainless steel perforated trays

OPCIJE | OPTIONS

Kolesca | Castors
Izvedba brez agregata | Remote unit
R290 okolju prijazen plin | R290 environment-friendly gas
Zračni filter kondenzatorja | Condenser air filter
Možnost visoke ali nizke vlage (CM modeli) | Low/high humidity mode (CM models)
RU verzija | RU version
R290 okolju prijazen plin | R290 environment-friendly gas

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors



zamenljiva guma

replaceable door gasket



zaobljeni vogali

rounded corners



kolesca

castors



zamenljiv agregat

removable refrigerating unit

Hladilne omare za pekarstvo

Refrigerated bakery cabinets



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
BKS 600	780x680x2000	505	140	-3/+10	425	230/50	20
BLF 600	780x680x2000	505	150	-5/-30	600	230/50	20
BKS 900	780x960x2000	770	170	-3/+10	640	230/50	20
BLF 900	780x960x2000	770	180	-5/-30	700	230/50	20

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304

Zunanji plašč sijaj | Scotchbrite polished outer coat

Avtomatsko delovanje | Fully automatic operation

Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm

Leva-desna vrata | Reversible doors

Samozaporna vrata | Self closing doors

Elektronska regulacija | Electronically controlled

Dinamično hlajenje | Fan assisted cooling

Zamenljiva guma na vratih | Replaceable door gasket

Nastavljive noge | Adjustable feet

Ključavnica | Lock

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C

Zamenljiva hladilna enota | Removable compact refrigerating unit

Primerne za pladnje 60 x 40 | Suitable for bakery norm trays 60 x 40

Primerne za pladnje 60 x 80 (Model 900) | Suitable for bakery norm trays 60 x 80

Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

20 parov nastavljivih in odstranljivih L profilov |

20 pairs of adjustable and removable L supports

OPCIJE | OPTIONS

Kolesca | Castors

Izvedba brez agregata | Remote unit

Steklena vrata pri BKS modelu | Glass door at BKS models

R290 okolju prijazen plin | R290 environment-friendly gas

Plastificirana rešetka 600 x 800 mm | Shelve 600 x 800mm

Nožno pedalo | Foot pedal



nožno pedalo

foot pedal



zamenljiva guma

replaceable door gasket



kolesca

castors



zaobljeni vogali

rounded corners



zamenljiv agregat

removable refrigerating unit



L profili

L supports

Hladilne omare za čokolado

Refrigerated cabinets for chocolate storage



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Področje vlage Humidity range [%]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CM 700 H	710x800x2000	650	150	+9/+18	30-50	230/50	5
BKS 600	710x680x2000	550	140	+9/+18	30-50	230/50	/

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304

Zunanji plašč sijaj | Scotchbrite polished outer coat

Avtomatsko delovanje | Fully automatic operation

Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm

Leva-desna vrata | Reversible doors

Samozaporna vrata | Self closing doors

Elektronska regulacija | Electronically controlled

Dinamično hlajenje | Fan assisted cooling

Zamenljiva guma na vratih | Replaceable door gasket

Nastavljive noge | Adjustable feet

Ključavnica | Lock

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C

Zamenljiva hladilna enota | Removable compact refrigerating unit

Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

Nastavljivi in odstranljivi U - profili | Adjustable and removable U - supports

5 plastificiranih rešetk (CM model) | 5 PVC coated shelves (CM model)

Nastavljivi in odstranljivi L - profili (BKS model) |

Adjustable and removable L - supports (BKS model)

Nastavljivi in odstranljivi U - profili (CM model) |

Adjustable and removable U - supports (CM model)

OPCIJE | OPTIONS

Kolesca | Castors

Izvedba brez agregata | Remote unit

Nožno pedalo | Foot pedal

R290 okolju prijazen plin | R290 environment-friendly gas



zamenljiva guma

replaceable door gasket



zaobljeni vogali

rounded corners



nožno pedalo

foot pedal



zamenljiv agregat

removable refrigerating unit



kolesca

castors

Hladilne omare za sladoled

Refrigerated cabinets for ice cream storage



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
CN 700 EC	710x900x2000	700	162	-5/-30	600	230/50	8
BLF 900 EC	780x980x2000	770	180	-5/-30	700	230/50	8

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304
Zunanji plašč sijaj | Scotchbrite polished outer coat
Avtomatsko delovanje | Fully automatic operation
Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm
Leva-desna vrata | Reversible doors
Samozaporna vrata | Self closing doors
Elektronska regulacija | Electronically controlled
Dinamično hlajenje | Fan assisted cooling
Zamenljiva guma na vratih | Replaceable door gasket
Nastavljive noge | Adjustable feet
Ključavnica | Lock
Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning
Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C
Zamenljiva hladilna enota | Removable compact refrigerating unit
Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

8 nastavljivih rešetak po višini | 8 adjustable shelves


OPCIJE | OPTIONS

Kolesca | Castors
Izvedba brez agregata | Remote unit
RF rešetka | SS shelve
R290 okolju prijazen plin | R290 environment-friendly gas



zamenljiva guma

replaceable door gasket

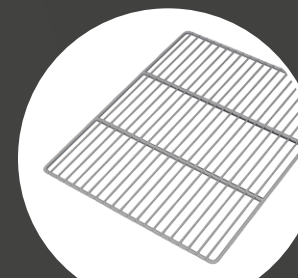


RF rešetka

SS shelve



zaobljeni vogali

rounded corners

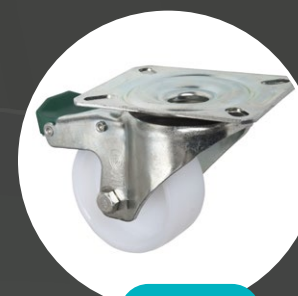

kolesca

castors



zamenljiv agregat

removable refrigerating unit

Šokerji

Blast chillers



Model Type	Kapaciteta Capacity [kg]	Zunanje mere External dimensions [mm]	Notranje mere Internal dimensions [mm]	Napajanje Power supply [V/hz]	Priključna moč Power input [w]	Masa Mass [kg]
BC 90	50 (65 to +3°C)	780x960x2120	640x450x1460	400V-3Ph 50 Hz	2500	190
BF 90	30 (65 to -18°C)	780x960x2120	640x450x1460	400V-3Ph 50 Hz	3000	190

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304

Zunanji plašč sijaj | Scotchbrite polished outer coat

Avtomatsko delovanje | Fully automatic operation

Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm

Leva-desna vrata | Reversible doors

Samozaporna vrata | Self closing doors

Elektronska regulacija | Electronically controlled

Dinamično hlajenje | Fan assisted cooling

Zamenljiva guma na vratih | Replaceable door gasket

Nastavljive noge | Adjustable feet

Ključavnica | Lock

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C

NOTRANJA OPREMA | FITTING

20 parov nastavljivih in odstranljivih L profilov | 20 pairs of adjustable and removable L supports

OPCIJE | OPTIONS

Kolesca | Castors

GN1/1 rešetka | GN1/1 shelve



zamenljiva guma

replaceable door gasket



zaobljeni vogali

rounded corners



kolesca

castors


Hladilni pulti

Refrigerated counters





Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]
TM1	880x700x900	100	80	-2/+8	320	230/50
TN1	880x700x900	100	95	-18/-24	500	230/50
TM2	1380x700x900	265	100	-2/+8	320	230/50
TN2	1380x700x900	265	110	-18/-24	500	230/50
TM3	1880x700x900	420	120	-2/+8	380	230/50
TN3	1880x700x900	420	130	-18/-24	550	230/50
TM4	2380x700x900	575	150	-2/+8	425	230/50
TN4	2380x700x900	575	160	-18/-24	600	230/50

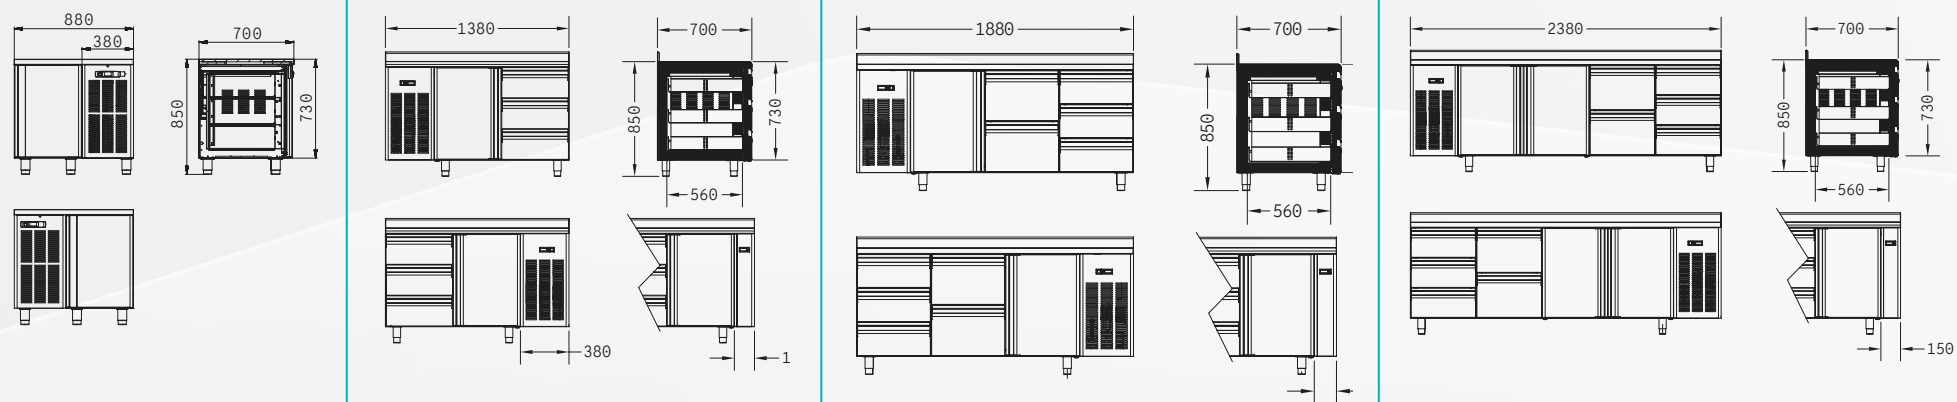

KARAKTERISTIKE | FEATURES

Zunanji in notranji plašč iz nerjaveče pločevine AISI 304 | Structure made of stainless steel AISI 304

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Modularna zasnova, fleksibilnost (možnost izbire: predali, vrata, agregat na levi/desni strani) | Modular system - flexibility (doors or drawers, refrigerating unit on left/right site)

Izolacija iz poliuretana (brez CFC) 70 mm | Isolation 70 mm - 100% CFC free

Zamenljiva magnetna tesnilna guma | Replaceable door and drawers gasket

Kompaktna hladilna enota | Compact refrigerating unit

Elektronska regulacija | Electronically controlled

Avtomatsko električno odtaljevanje | Automatic electric defrost

Samozaporna vrata | Self closing doors

Nastavljive noge | Adjustable feet

Delovanje do temperature okolice +43 °C | High ambient operation up to +43°C

Enakomerno hlajenje | Steady fridge temperature

Dinamično hlajenje | Fan assisted cooling

NOTRANJA OPREMA | FITTING

Plastificirane rešetke (pri vratih) | Plastic-coated shelves for door module

Teleskopska vodila (pri predalih) | Telescopic guides

OPCIJE | OPTIONS

Zračni filter | Air filter

RH funkcija | RH function

RU verzija | RU version

RF rešetke | SS shelves

DODATNA OPREMA | ACCESSORIES

Kolesca | Castors

Korito | Sink

Delovna plošča z zaščitnim robom | Working top with splash back



zamenljiva guma

replaceable door gasket



notranji uparjalnik

internal evaporator



zaobljeni vogali

rounded corners



kolesca

castors



zamenljiv agregat

removable refrigerating unit

Solatni bari

Buffet lines



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Napajanje Power supply [V/hz]	Poraba energije Energy consumption [kWh/24h]	Hladivo Refrigerant
KW 3	1780x1166x1555	3 X GN 1/1	100	+3/+10	230/50	4.2/5.6	R-290
KW 4	2110x1166x1555	4 X GN 1/1	140	+3/+10	230/50	5.2/6.1	R-290
KW 4 plus	2170x1164x1622	4 X GN 1/1	200	+3/+10	230/50	5.5/6.3	R-290
KW 6	2790x1166x1555	6 X GN 1/1	230	+3/+10	230/50	6.5/7.7	R-290
KW6 plus	2780x1164x1622	6 X GN 1/1	300	+3/+10	230/50	6.5/7.7	R-290

KARAKTERISTIKE | FEATURES

Maksimalna globina GN posode 150 mm | Maximum depth of GN pan 150mm

Plinsko oddaljevanje | Hot gas defrost

R290 okolju prijazen plin | R290 environment-friendly gas

Dinamično hlajenje | Dynamic cooling

Dvigljiva steklena nadgradnja | Lifting glass cover

Osvetljava | Illumination

OPCIJE | OPTIONS

Barva in material delovne površine in oboda po izbiri | Custom colour and material of working desk and structure around the buffet

Električno oddaljevanje | Electric defrost

R404a hladilni plin | R404a cooling gas

R134a hladilni plin | R134a cooling gas


Točilni pulti

Counters for beverages





Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]
TP 1	975x700x830	265	80	+2/+10	250	230/50
TP 2	1550x700x830	265	100	+2/+10	350	230/50
TP 3	2125x700x830	420	120	+2/+10	350	230/50
TP 4	2700x700x830	575	140	+2/+10	450	230/50

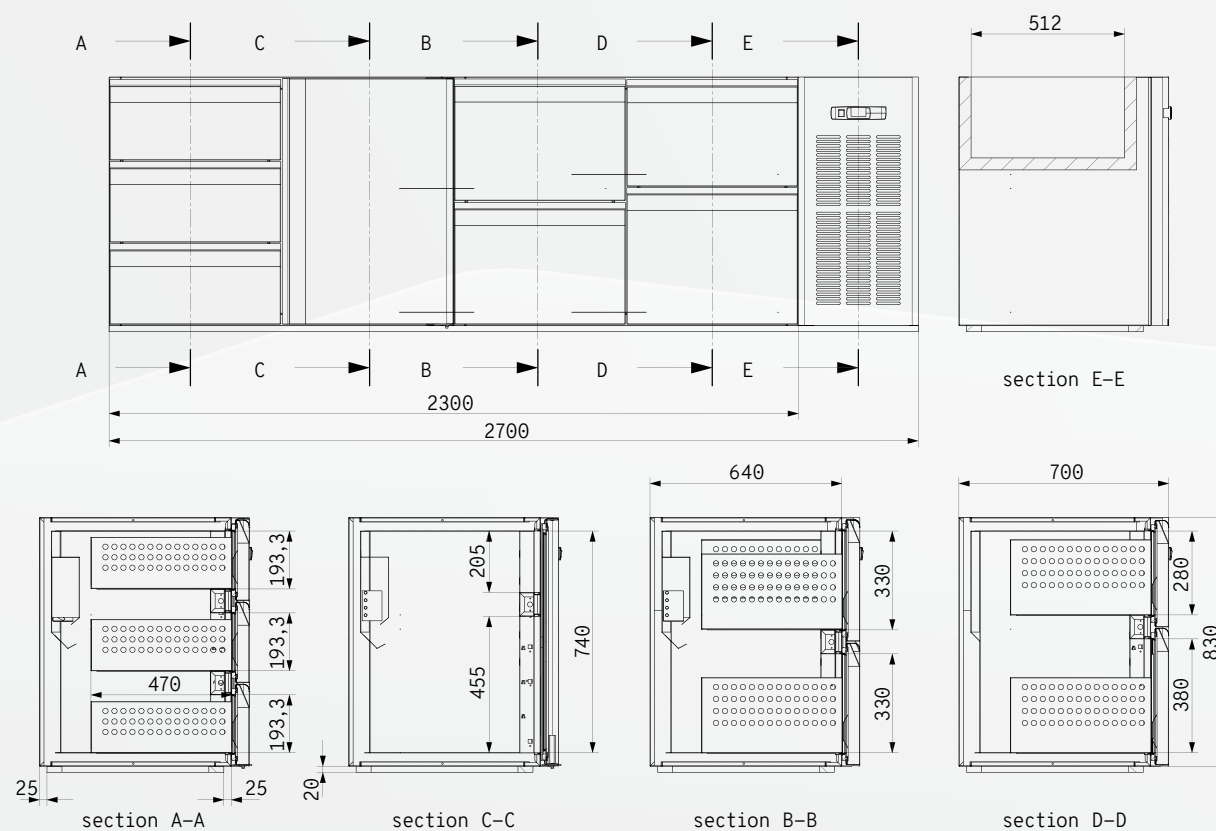

KARAKTERISTIKE | FEATURES

Zunanji in notranji plašč iz nerjaveče pločevine AISI 304 | Structure made of stainless steel AISI 304

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Modularna zasnova, fleksibilnost (možnost izbire: predali, vrata, agregat na levi/desni strani) | Modular system - flexibility (doors or drawers, refrigerating unit on left/right site)

Izolacija iz poliuretana (brez CFC) 40 mm | Isolation 40mm - 100% CFC free

Zamenljiva magnetna tesnilna guma | Replaceable door and drawers gasket

Elektronska regulacija | Electronically controlled

Avtomatsko električno odtaljevanje | Electric defrost

Samozaporna vrata | Self closing doors

Delovanje do temperature okolice +43 °C | High ambient operation up to +43°C

Enakomerno hlajenje | Steady fridge temperature

Dinamično hlajenje | Fan assisted cooling

Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

Teleskopska vodila (pri predalih) | Telescopic guides

Vrata z inox pladnjem | door modul

Modul 2 predalov | 2 drawer modul

Modul 3 predalov | 3 drawer modul

Modul 1/3-2/3 predal | 1/3-2/3 drawer modul

Modul 5/12 7/12 predal | 5/12 7/12 drawer modul

OPCIJE | OPTIONS

Zračni filter | Air filter

RH funkcija | RH function

RU verzija | RU version

RF rešetke | SS shelves

DODATNA OPREMA | ACCESSORIES


Korito | Sink

Hladilnik steklenic | Bottle cooler



hladilnik steklenic

bottle cooler

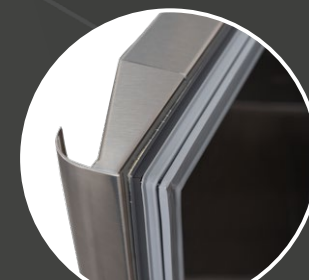

ergonomski ročaj

ergonomic handle



zamenljiva guma

replaceable door gasket

Sušilniki sadja

Fruit dryers



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. rešetk No. of plates
CFD 350 SS	710x800x1200	250	120	+40/+50	650	230/50	6
CFD 700 SS	710x800x2000	550	150	+40/+50	650	230/50	11
CFD 900 SS	780x960x2000	770	180	+40/+50	650	230/50	11
CFD 1400 SS	1420x800x2000	1240	300	+40/+50	1300	230/50	22

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304

Zunanji plašč sijaj | Scotchbrite polished outer coat

Avtomatsko delovanje | Fully automatic operation

Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm

Leva-desna vrata | Reversible doors

Samozaporna vrata | Self closing doors

Elektronska regulacija | Electronically controlled

Dinamično hlajenje | Fan assisted cooling

Zamenljiva guma na vratih | Replaceable door gasket

Nastavljive noge | Adjustable feet

Ključavnica | Lock

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C

Zamenljiva sušilna enota | Removable compact drying unit

NOTRANJA OPREMA | FITTING


Mrežasti pladnji | Stainless steel mesh trays

OPCIJE | OPTIONS

Kolesca | Castors

Izvedba brez agregata | Remote unit

Število pladnjev po želji | Custom number of plates

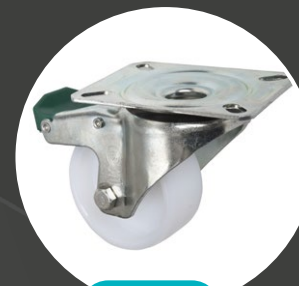


kolesca

castors



zamenljiva guma

replaceable door gasket

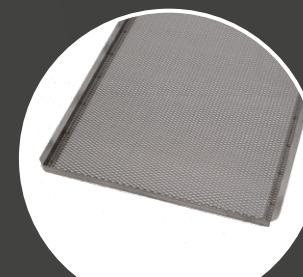

pladenj sušilnika

dryer tray



zaobljeni vogali

rounded corners









- * Hladilne omare GN2/1 Refrigerated cabinets GN2/1
 - * Hladilne omare Q Refrigerated cabinets Q
 - * Hladilne omare 500 Refrigerated cabinets 500
 - * Hladilne omare za ribe Fish cabinets
 - * Hladilne omare za kampe Camping cabinets
- * Hladilne omare brez stebrička Refrigerated cabinets without vertical divider
 - * Hladilne omare za pekarstvo Refrigerated bakery cabinets
- * Hladilne omare za čokolado Refrigerated cabinets for chocolate storage
- * Hladilne omare za sladoled Refrigerated cabinets for ice cream storage
 - * Šokerji Blast chillers
 - * Hladilni pulti Refrigerated counters
 - * Solatni bari Buffet lines
 - * Točilni pulti Counters for beverages
 - * Sušilniki sadja Fruit dryers

ALPFRIGO®

Alpfrigo d.o.o.
Obrtna cona Logatec 11a
SI-1370 Logatec
Slovenija

T +386 (0)40 752 499
E info@alpfrigo.com

www.alpfrigo.com